

Technical data

Voltage	U	230	V
Phase		1	~
Frequency	f	50	Hz
Speed	n	1415	RPM
Power consumption	P _e	200	W
Nominal current	I _{nom}	0.9	A
Maximum current	I _{max}	1.6	A
Cos φ		0.94	
Capacitor		3.5/450	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (2 m)	L _{p (meas.)}	65	dB(A)
Sound pressure level (7 m)	L _{p (calc.)}	54	dB(A)
Weight		14.1	kg
Packing dimensions		560x560x315	mm

Fan details


Impeller blades	6
Impeller type	3
Impeller system	C
Impeller material	PP

Control options

Triac controller	Yes
Transformer	Yes
Frequency drive	No

Characteristics

0 Pa 4900 m³/h
 50 Pa 4100 m³/h

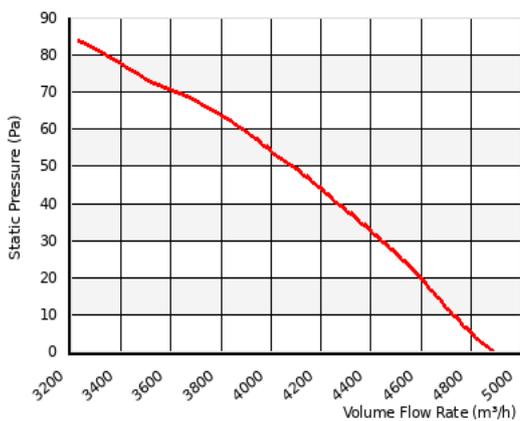


Please note: Picture may deviate from original product

Approval(s)




Wiring diagram

BA01 - 1 Phase - Standard - CCW

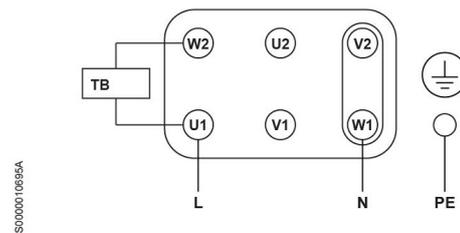

Dimensions

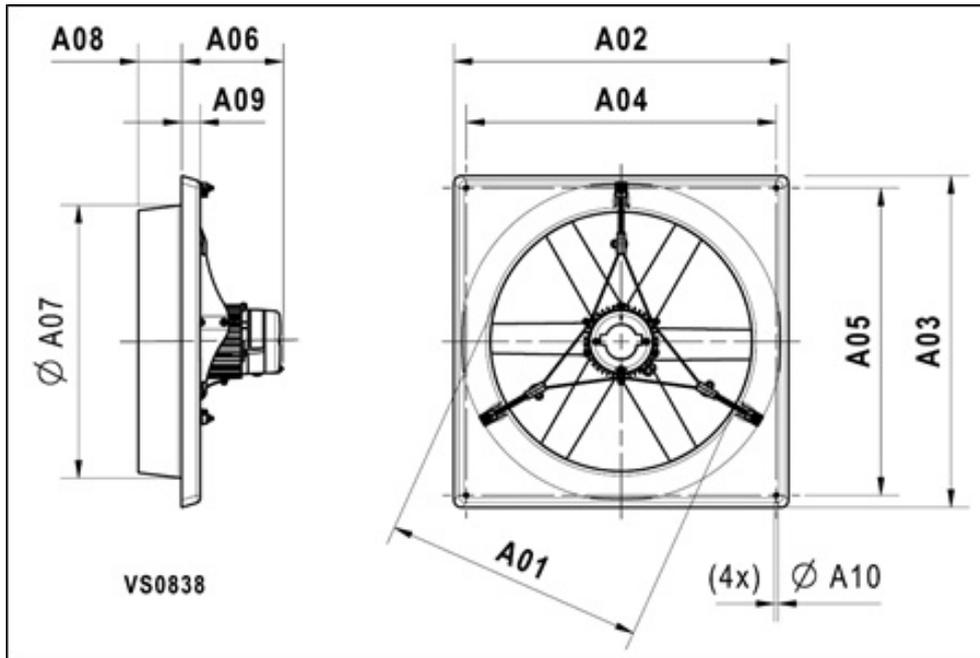

A01:	415 mm
A02:	542.5 mm
A03:	542.5 mm
A04:	495 mm
A05:	495 mm
A06:	192 mm
A07:	440 mm
A08:	84 mm
A09:	36 mm
A10:	7.5 mm