

DOSATRON D45

VLOEISTOF DOSEERTECHNIEK

Tuinbouwtechniek
& -benodigdheden



SPECIFICATIONS

- Injection Range :
0.5 - 3 %
[1 : 200 - 1 : 33]
- Water flow range* :
100 l/h - 4.5 m³/h
[1.66 l/mn - 75 l/mn]
[0.4 US GPM - 20 US GPM]
- Operating pressure :
0.5 - 5 bar
[7 PSI - 70 PSI]
- Concentrated additive injection :
0.5 l/h - 135 l/h
[0.28 US Fl oz/min - 0.60 US GPM]

* For operating unit with other fluids than water,
please contact us

4.5
m³/h



**A unique technology
associating all dosing
functions**

Dosing Technique :

Non-electric proportional

Energy Source :

Water flow and pressure

Integrated functions :

- **Metering** : volumetric hydraulic motor
- **Injecting** : continuous proportional injection of liquid or soluble concentrate
- **Regulating** : proportionality servo-controlled by the water flow
- **Mixing** : integrated mixing

Package contents :

1 Dosatron, 1 wall bracket,
1 Suction tube 175 cm [69"]
Ø 6 X 9 mm [1/4" id X 3/8"od]
1 Owner's manual.




KaRo BV
Tulpenmarkt 4
1681 PK Zwaagdijk

T 0228 - 56 31 35
E info@karobv.nl
www.karobv.nl



Operating principle

Installed directly in the water supply line, the Dosatron operates by using the flow of water as the power source. The water activates the Dosatron, which takes up the required percentage of concentrate directly from the container and injects it into the water. Inside the Dosatron, the concentrate is mixed with the water, and the water pressure forces the solution downstream. The dose of concentrate will be directly proportional to the volume of water entering the Dosatron, regardless of variations in flow or pressure, which may occur in the main line.

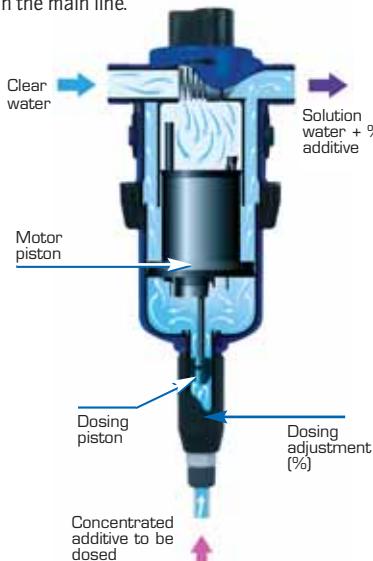

Proportional injection externally adjustable



The injection rate is set by lining up the top of the adjusting sleeve with the desired ratio on the scale. The amount of injected concentrate is proportional to the amount of water coming into the Dosatron : i.e. Adjustment at $1\% = 1 : 100 = 1$ Volume of concentrate into 100 Volumes of water.

Specifications

| General | |
|---|--|
| - Maximum operating water temperature : | 40°C [104°F] |
| - Minimum operating water temperature : | 5°C [41°F] |
| - Dosing rate : | i.e. Adjustment at 1% = 1:100 = 1 V concentrate into 100 V water |
| - Average dosing accuracy : | +/- 5% (Charts on demand) |
| - Repeatability : | +/- 3% (API standard) |
| - Pressure loss : | 0.1 - 1.7 bar [1.45 - 24.65 PSI] (depending on operating conditions) |
| Other integrated functions | |
| - Internal motor filter : | no |
| - Inlet/Outlet : | 1" 1/4 M : BSP-NPT Ø 33 x 42 mm |
| - Built-in by-pass : | yes |
| - Built-in airbleeder : | yes |
| - Built-in anti-siphon device : | no |
| Motor | |
| - Motor : | differential hydraulic piston |
| - Motor capacity : | 0.8 L [0.2112 US gallons] (1 cycle) |
| - Mixing chamber : | integrated |
| Dosage | |
| - Injection : | internal at mid-cycle |
| - Dosing plunger : | simple effect, injection on the upstream |
| - Injection check valve : | spring-loaded cone |
| Suction | |
| - Self-priming : | yes |
| - Maximum viscosity of concentrate : | 400 cSt at 20°C [68°F] |
| - Maximum vertical or horizontal suction of the concentrate : | 4 m [13 ft] |
| - Strainer : | yes - foot strainer with weight |

Markets

Environment - Hygiene - Water treatment - Vehicle wash - Metal processing - Food processing - Graphic Arts - Horticulture - Livestock...

Principal applications :

Medication - Disinfecting - Cleaning - Fertigation - Phytosanitation - Supplementation - Lubrication - PH/TH Correction - Sanitation - Flocculation - Vehicle wash...

Installation

Regulations : Refer to local water regulations, prior to installing your Dosatron.


To optimize your Dosatron, we advise to :

- Install a filter (300 mesh [60 microns]) upstream, depending on your water quality.
- Change the dosing seals once a year.
- Rinse as often as possible with clear water.
- Turn off the water supply and allow the pressure to drop to zero before adjusting the injection rate.
- Install necessary protections for excess flow, excess pressure and water hammer (anti-hammer flow/pressure device).
- Install your Dosatron on a total by-pass line.

For all other installation advice, please consult us.

Size :

- Package size : 62 x 26 x 24.5 cm [24" 3/8 x 10" 1/4 x 9" 3/4]
- Package weight : 3.2 kg [~7 US lbs]

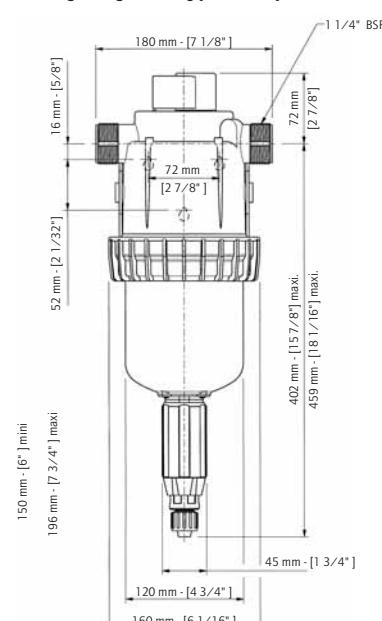

* exist in REIE

Other product lines available to treat water flows up to 1.5 m³/h, 2.5 m³/h, 8 m³/h, 20 m³/h, 30 m³/h, 60 m³/h... For special models, accessories and particular systems : please consult us.

DOSATRON INTERNATIONAL

Rue Pascal - B.P. 6 - 33370 TRESSES (BORDEAUX) - FRANCE
Tel. 33 (0)5 57 97 11 11 - Fax. 33 (0)5 57 97 11 29 / 33 (0)5 57 97 10 85
e.mail : info@dosatron.com - <http://www.dosatron.com>

S.A. DOSATRON INTERNATIONAL au capital de 3 050 000 EUROS - SIRET BORDEAUX 418 826 822 00011 - APE 291 B - N° TVA/VAT : FR96418826822

Standard material

Housing : polyacetal, EPDM
Motor piston : polypropylene, polyamide, stainless steel, afluor, polyacetal
Injection area : polypropylene, polyethylene, hastelloy (check valve spring)
Injection hose : PVC

Available options

(■ : Option ● : standard ★ : not available for this model)

Optimized compatibility

● AF : Recommended seals for alkaline concentrate

■ VF : Recommended seals for acid concentrate

■ PVDF : Housing

■ H : Hastelloy plunger rod

■ IE : External injection

★ V : Kit for viscous concentrate

■ Injection hose : Special material hose and foot strainer available



PVDF housing.

Optimized installation

● BP : integrated by-pass

■ Other fittings

★ Strap

★ Support legs

■ Other : please contact us



The external injection allows dosing of certain corrosive concentrates.

These options allow adapting your Dosatron to your needs. Contact our technical service to help determine what option you may need.

Each Dosatron unit is factory tested.