


SPECIFICATIONS

1. DESCRIPTION: AC/DC POWER ADAPTOR - US.
2. ENCLOSURE MATERIAL: BLACK PVC.
3. INPUT PLUG: TYPE F.
4. OUTPUT PLUG: LEAD WIRES, 6±2 STRIPPED.
5. INPUT VOLTAGE: 100-240 VAC 50% HZ
6. OUTPUT VOLTAGE: 24VDC±5%.
7. OUTPUT AMP: 5.0A MAX.
8. OPERATING TEMP: -29°C ~ +45.5°C.
9. RELATIVE HUMIDITY: 5% ~ 95% RH.
10. SAFETY STANDARDS:
UL1310 CLASS 2
FCC PART 15 SUBPART B CLASS B
ROHS
11. ALL DIMENSIONS ARE REFERENCE ONLY (MILLIMETERS).

REVISIONS

REV	ECN	DESCRIPTION	BY	DATE
A	01884	INITIAL RELEASE	JMM	10-05-16
B	026498	ITEM 1 UPDATED	FCW	07/28/22

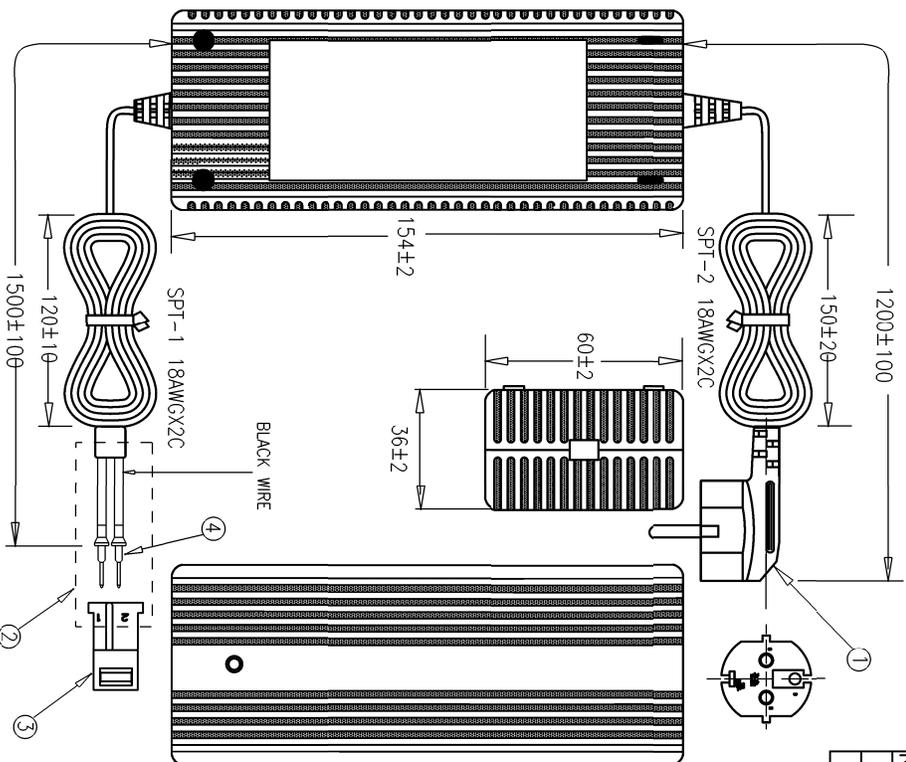

ITEM	PART NUMBER	DESCRIPTION	QTY. REQ.
1	91008090EU	PMR ADAPTER 110/240V-24V CE EU	1
2	91006154	SHRINK TUBING 12MM-4MM	2 INCHES
3	1000876-01	AMPS CONNECTOR #1-480318-0	1
4	1000876-0	AMPS PIN 60619-1	2

APPROVALS		DATE	TITLE
DRAWN BY	JMM	06-04-16	SEE NOTES
CHECKED BY	RV	06-04-16	
APPROVED BY	QUINN	06-04-16	
TOLERANCES ARE		MILLIMETERS	
FRACTIONS	±1/32	[0.51]	SCALE: NONE
DECIMALS	X.X±0.02	[0.25]	SHEET 1 OF 1
	X.XX±0.01	[0.25]	
ANGULAR	X°XX'±0.05	[0.127]	
SURFACES	±1/2	[1.6]	

UNLESS OTHERWISE SPECIFIED

DIMENSIONS AND TOLERANCES ARE AS PER ASME Y14.5M (LATEST REV.) PRIMARY DIMENSIONS ARE IN MILLIMETERS AND DECIMALS ARE IN MILLIMETERS CRITICAL DIMENSIONS AND SPECIFICATIONS INDICATED WITH

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF XYLEM. THIS DOCUMENT IS ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE DISCLOSED TO A THIRD PARTY OR REPRODUCED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF XYLEM.

MATERIAL:		
DWC NO.		91007090
REVISION		B