
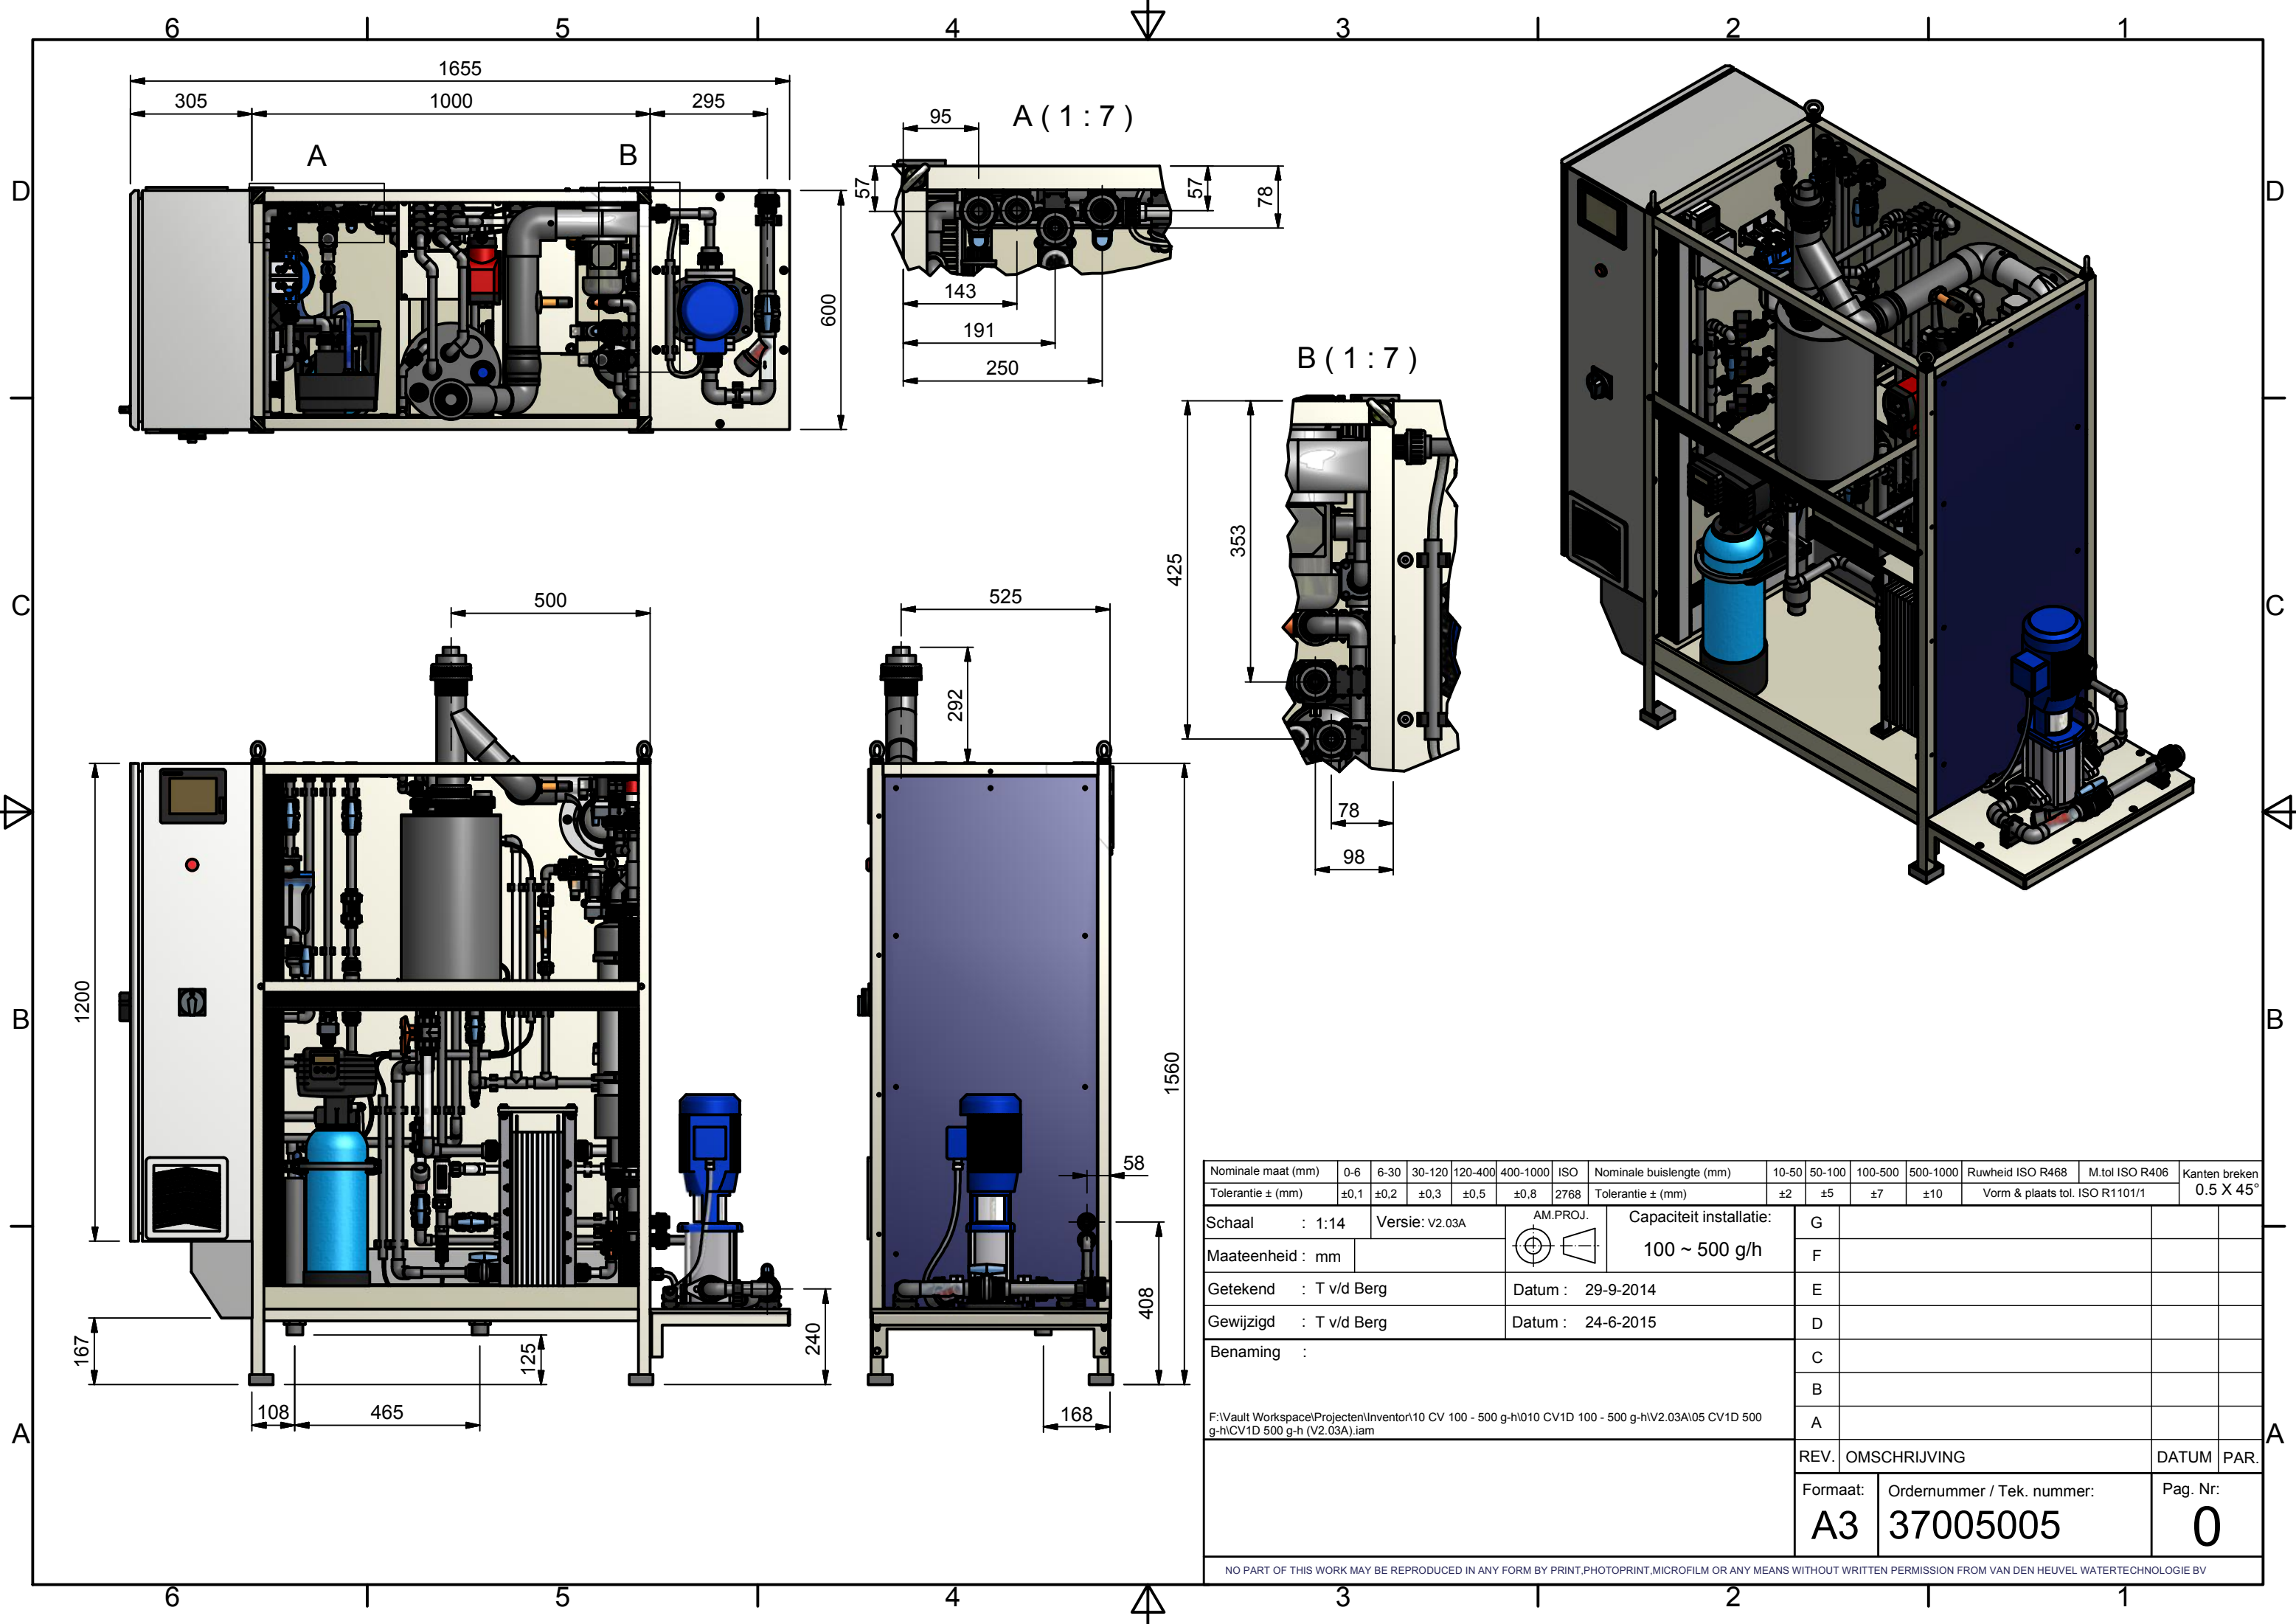




Nominale maat (mm)	0-6	6-30	30-120	120-400	400-1000	ISO	Nominale buislengte (mm)	10-50	50-100	100-500	500-1000	Ruwheid ISO R468	M.tol ISO R406	Kanten breken	
Tolerantie ± (mm)	±0,1	±0,2	±0,3	±0,5	±0,8	2768	Tolerantie ± (mm)	±2	±5	±7	±10	Vorm & plaats tol. ISO R1101/1		0.5 X 45°	
Schaal : 1:14		Versie: V2.03A				Capaciteit installatie:		G							
Maateenheid : mm						100 ~ 500 g/h		F							
Getekend : T v/d Berg				Datum : 29-9-2014				E							
Gewijzigd : T v/d Berg				Datum : 24-6-2015				D							
Benaming : F:\Vault Workspace\Projecten\Inventor\10 CV 100 - 500 g-h\010 CV1D 100 - 500 g-h\V2.03A\05 CV1D 500 g-h\CV1D 500 g-h (V2.03A).iam								C							
								B							
								A							
								REV.	OMSCHRIJVING				DATUM	PAR.	
								Formaat:		Ordernummer / Tek. nummer:				Pag. Nr:	
								A3		37005005				0	