


## Pure Chlorine Unit summer stop

If the chlorine production section is to be made free of chlorine, it is recommended to refresh the membrane cell. This means that the finished salt (anolyt) may be a fairly acidic product, and replaced with new brine. The latter is much more user-friendly. To do this, everything in the installation must be enabled.

From the main menu, go to "BEDIENING" :



Then go to "PRODUCTIE" :

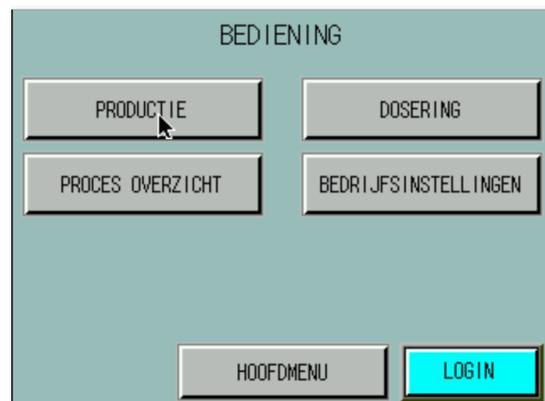

Here you can press "start anode refresh" . Then, the text goes back to "AAN" and the installation is going to run a process. When done, the text returns to "UIT"



If there is no release to dose chlorine, no chlorine is produced. Pure Chlorine Unit is then on standby. Another option is to turn the unit off with the main switch. Startup must occur in both cases by KaRo. When starting up, the necessary maintenance is also taken care of.

