


Technical data Corode magnetic drive pumps

MAG-30



Article number	MAG-30 PP	MAG-30 PVDF
Materials available	PP	PVDF
O-ring	EPDM	Viton
Max. temperature	60°C	90°C
Max. flow	: 34,5m ³ /h	
Max. head	: 24mtr.	
Max. viscosity	: 200 cSt	
Motor	: 2.2kW, 230/400V, 7.75/4.45Amp, 3Ph, 50Hz, IP55	

Unless otherwise specified, all dimensions are in millimetres

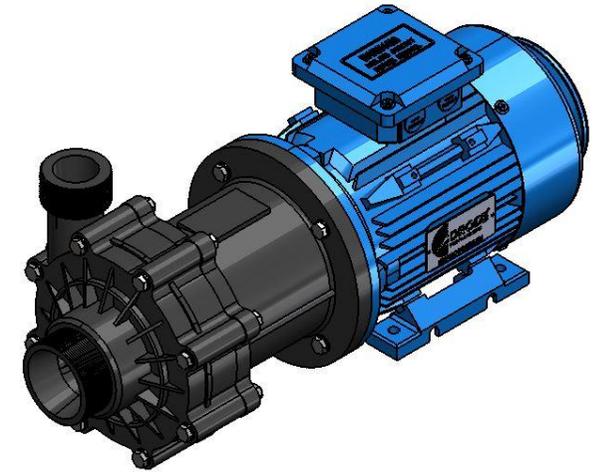

MAG-30

