


OPM 30 MULCHFOLIE

METALLOCENE VERSTERKTE FOLIE

Tuinbouwtechniek
& -benodigdheden



- Metallocene versterkte folie
- Dikte: 30 micron, ook verkrijgbaar in andere diktes
- Breedte: 100 – 110 – 120 – 150 – 160 cm
- Lengte: 1.000 – 1.500 mtr per rol
- Ook in 35 micron zwart/wit coex
- Ook met plantgaten Ø 50mm ----->

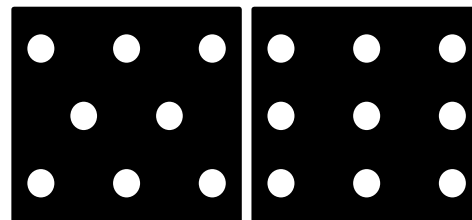

- De ideale mulchfolie voor o.a. aardbei, courgette, bloemen, augurk, sjalotten, venkel en houtige gewassen
- Eenvoudig te leggen met bestaande machines



KaRo BV
Tulpenmarkt 4
1681 PK Zwaagdijk

T 0228 - 56 31 35
E info@karobv.nl
www.karobv.nl



OPM 30 mulchfolie

Elastic modulus/module d'élasticité	MD	(ASTM D882)	380	N/mm ²
E- Modul / elasticiteitsmodulus	TD	(ASTM D882)	320	N/mm ²
Tensile strength/résistance à la rupture	MD	(ASTM D882)	33	N/mm ²
Reißfestigkeit/treksterkte	TD	(ASTM D882)	28	N/mm ²
Elongation at break/allongement à la rupture	MD	(ASTM D882)	400	%
Reiðdehnung/rek bij breuk	TD	(ASTM D882)	500	%
Tear resistance Elmendorf/résistance au déchirement	MD	(ASTM D1922)	85	N/mm
Reißfestigkeit/scheurweerstand	TD	(ASTM D1922)	>100	N/mm
Impact strength Energy/résistance au choc		(OP WPC-020)	45	J/mm
Schlagzähigkeit/impacksterkte				
This statement is based on our current knowledge and covers commercial products supplied by Oerlemans Plastics BV at the date of issue. Since conditions of use are outside control of Oerlemans Plastics BV, Oerlemans Plastics makes no warranties, express or implied, and assumes no liability in connection with any use of this information.				

